


UNLESS OTHERWISE SPECIFIED,
ALL DIMENSIONS ARE IN METRIC.

Revised Details			
Item.	Description	Date	by
△			

1800±15

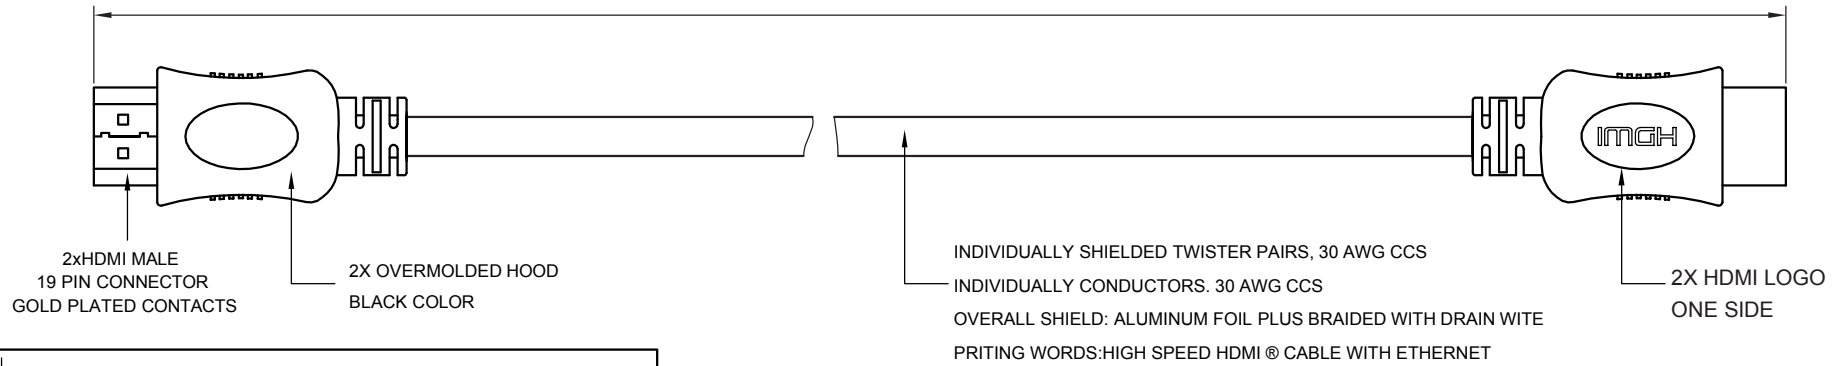

PIN 1	Signal Assignment	PIN 2
1	↔	1
3		3
4	↔	4
6		6
7	↔	7
9		9
10	↔	10
12		12
14	↔	14
19		19
13	CEC	13
14	SCL	14
15	SDA	15
16	+5 Volts Power	16
18		18
shell		shell

Notes:

1. CABLE ASSEMBLY SHALL BE TESTED FOR CONTINUITY
2. HDMI CABLE 2.0 VERSION 30AWG CCS, 15+1, OUTER JACKET OD=6M±0.15mm
3. HOOD:MOLDING TYPE,BLACK IN COLOR
4. AL FOIL MUST BE WRAP 360 AROUND THE INNER INSULATOR.
5. CABLE ELECTRICAL TEST:
<1>. 100% OPEN SHORT & MISS WIRE TEST.

 Cablexpert Gembird Europe B.V.	DES.	LOUISE	4th August 20		
	CHK.		MDL	CC-HDMI4L-6	
	APPR.		PDT.TIT	CC-HDMI4L-6	
		SCL.	1:1	SPEC	
				30AWG	
Unit: MM		Page 1	Pages	CATEGORY	AUDIO VIDEO